

SD780 Series General High-performance Servo System



VEICHI

Suzhou VEICHI Electric Co., Ltd

No.1000 Songjia Road, Guoxiang street, Wuzhong Economic and Technological Development Zone, Suzhou

Tel: +86-512-6617 1988 Fax: +86-512-6617 3610

Facebook: <https://www.facebook.com/veichigroup>

Whatsapp: +86- 138 2881 8903

<https://www.veichi.org/>



Official Website

*Version:2022 V1.1

VEICHI Electric Co., Ltd all rights reserved, subject to change without notice.



About us

VEICHI Electric (Stock code: 688698), a high-tech enterprise engaged in the R&D, production and sales of industrial automation products, has always focused on the fields of electric drive and industrial control since its establishment. It has been listed as the "Jiangsu Provincial Enterprise Technology Center", "Jiangsu Private Technology Enterprise", "Jiangsu Provincial Specialized and New Giant Enterprise", "Jiangsu Provincial Engineering Technology Research Center", "Suzhou Gazelle Enterprise" and "Competitive Brand in Motion Control Field". After years of independent R&D and innovation, VEICHI has developed a series of independent intellectual property rights. By the end of June 30, 2022, a total of 140 patents have been granted, including 33 invention patents.

VEICHI has R&D and production bases in Suzhou and Shenzhen, and has established a wholly-owned subsidiary in India. At present, the company's business covers many countries and regions, providing global customers with competitive, safe and reliable products and services.

We supply a wide range of products, including inverters from 0.4kW to

5,600kW, servo systems from 50W to 200kW, motion controllers, PLCs and HMIs, to diverse customers in lifting and mining equipment, rail transportation, machine tools, compressors, plastics, solar water pumping, building materials, robots or manipulators, printing and packaging, textile and chemical fiber, metallurgy, municipal, petroleum, chemical and other industries.

VEICHI has established 20 service outlets in China, and developed 153 channel dealers, covering 31 provinces and Hong Kong, Macao and Taiwan regions across the country, forming a wide-ranging and efficient distribution and service network to provide customers with high-quality products and efficient service.

VEICHI will continue to adhere to the business philosophy of "Guided by market demand, Driven by technological innovation", to expand and strengthen the core businesses of inverters, servo systems and motion controllers, and intelligent IoT, and always insist on providing customers with best products and services. VEICHI will spare no effort to make contributions to promote the development of electric drive and industrial control.


SD780 General High-performance Servo System

Superior Algorithm

Smart and easy to use

SD780 General High-performance Servo System

Cost-effective

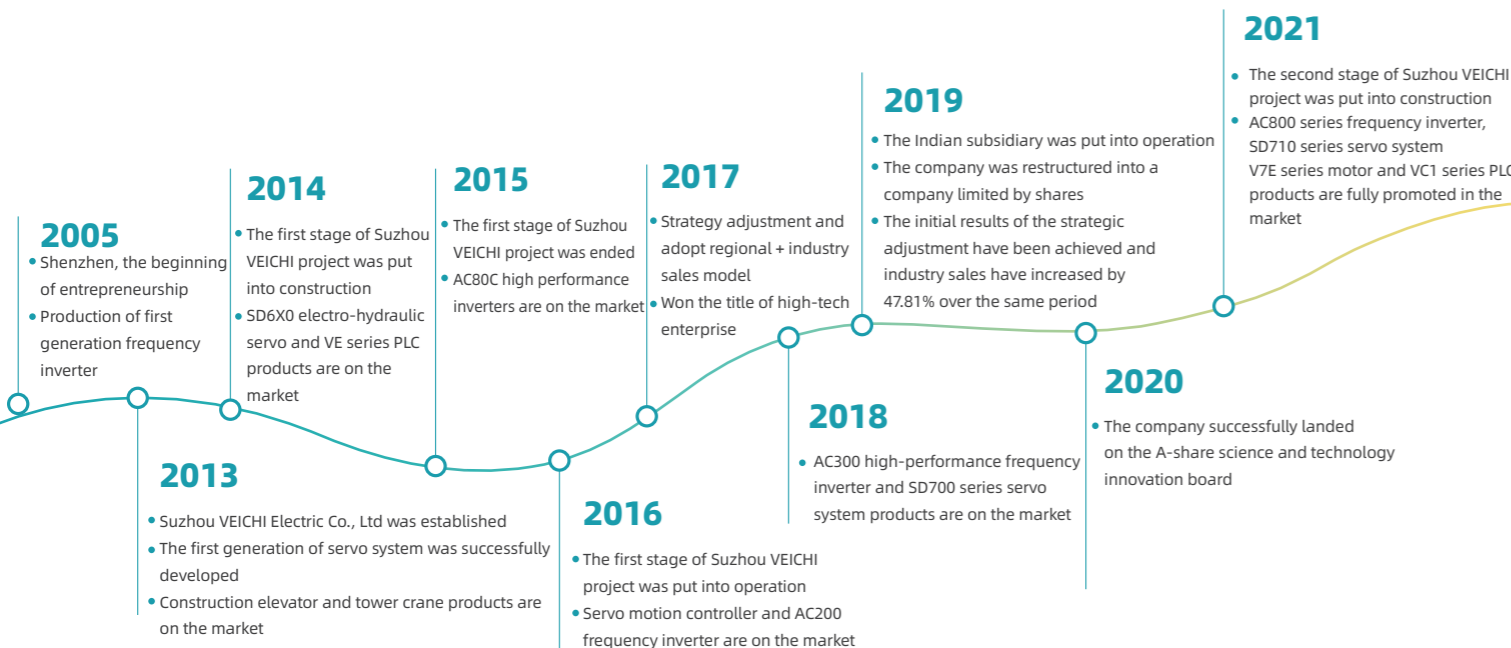


VEICHI SD780 Series General High-performance Servo System

Product features


International standard UL certification

International standard UL certification, Applicable to all countries with UL certification requirements worldwide

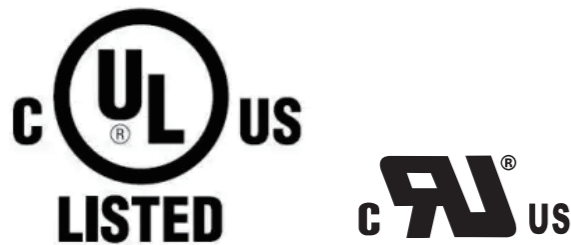


Data copy & Transfer

The debugging software has the function of copying drive parameters, eliminating the tedious operation of parameter setting of the same model.

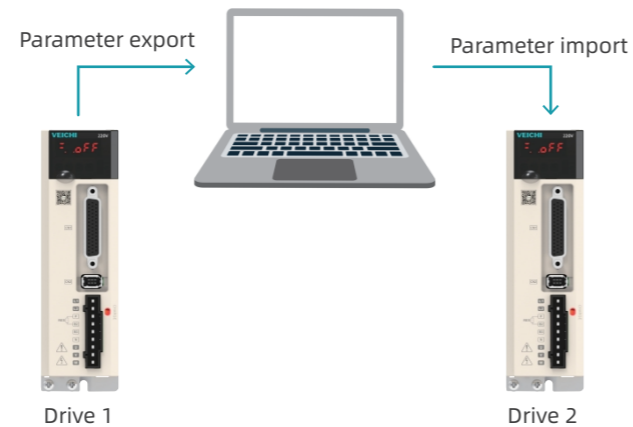


Simplified debugging panel

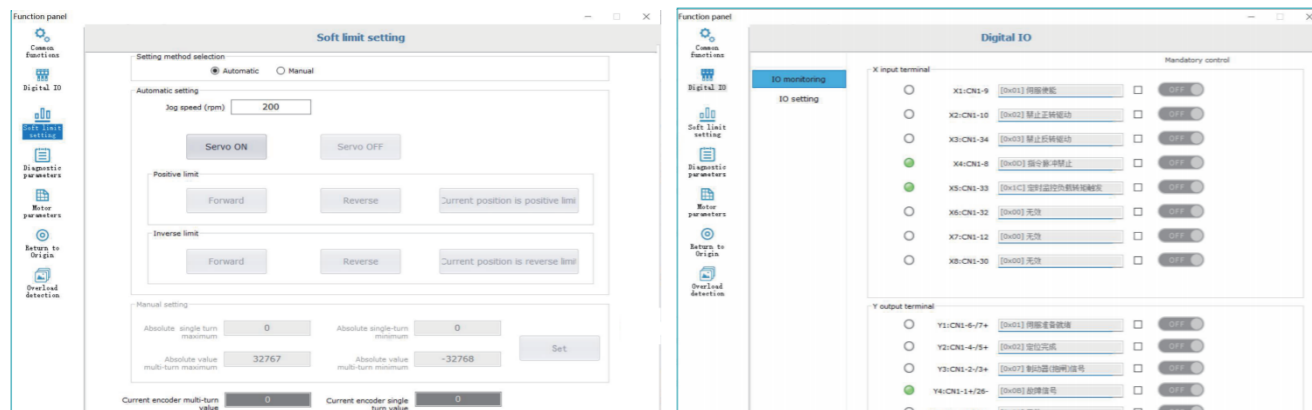

Self-adjusting for different applications

1. Treat differently according to different mechanical structures
2. Complete the intelligent setting of various complex loop parameters
3. Automatic setting according to mechanical conditions, no manual setting required
4. The fastest position setting time is up to 10ms

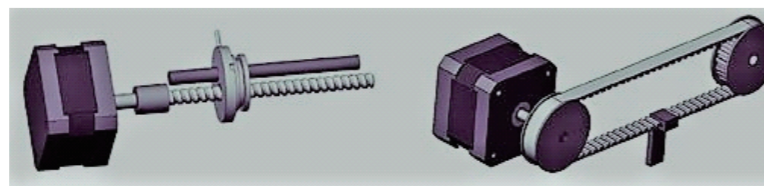


Mechanical structures such as lead screws, timing belts, and rigid bodies are treated differently

STO function


Standard SIL3 safety torque off function, suitable for new energy, lithium battery, photovoltaic equipment and other industries. Provide greater security to device users.

Intelligent settings

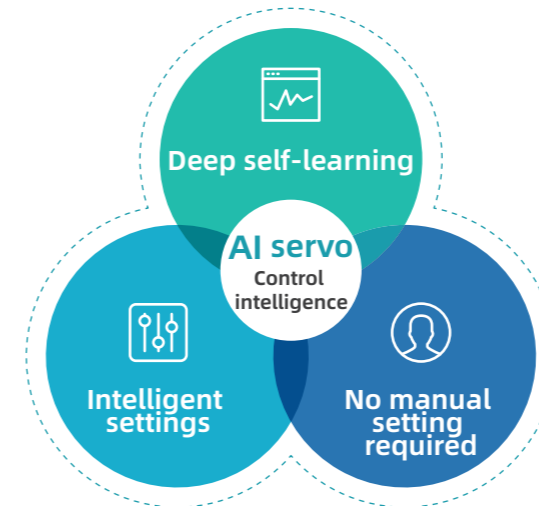

Compatible with 17bit/23bit absolute encoders

With absolute encoder, the position is remembered when the power is turned off. Battery life is more than 3 years. Encoders with different resolutions to meet different application options.

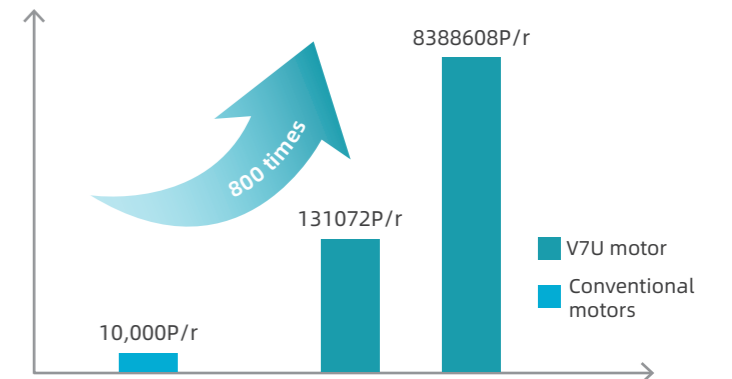


Powerful bus communication function



Micro USB	Micro USB host computer dedicated interface (Standard accessory)
RS485	RS485 communication (Standard accessory)
CANopen	CANopen communication (Optional accessory)
EtherCAT	EtherCAT communication (Optional accessory)

High-performance as ever

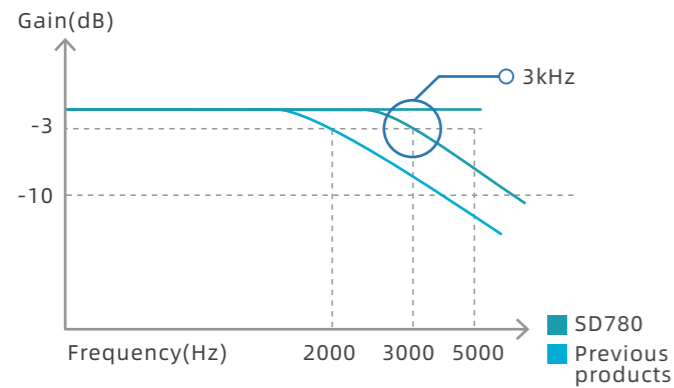

Upgraded hardware, Compacted structure

Hardware and structure upgrades, the size of the 5R5 model is reduced by 30%.



Approximately 30% smaller

Drive Model Description

SD 780 - 3R3 A - P A

SD: Servo drive code

780: High-performance Servo Series

Rated current

(A) 220VAC	
1R8	1.8A
3R3	3.3A
5R5	5.5A

Encoder type
A: Absolute type


Drive Type
P: Pulse type
C: CANopen bus type
E: EtherCAT bus type

Rated voltage
A: 220V AC

Drive power and chassis division

Model number	Input	Output		Chassis size
	Rated voltage (V)	Rated current (A)	Instantaneous current (A)	
SD780-1R8A	single-phase 220	1.8	6.3	A
SD780-3R3A	single-phase 220	3.3	11.6	
SD780-5R5A	single-phase /three-phase 220	5.5	16.5	

Drive dimension

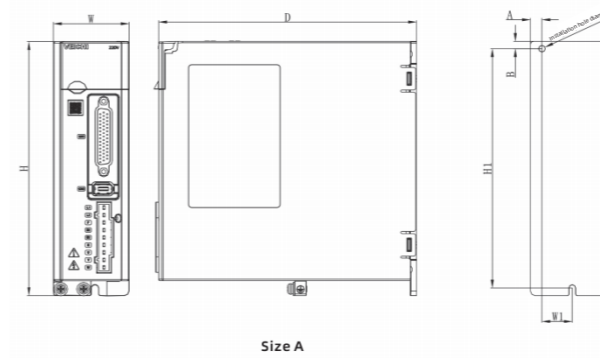

Model	External dimensions (mm)			Installation dimension (mm)				Installation hole diameter
	W	H	D	W1	H1	A	B	
SD780-1R8A-**	50	170	170	20	160	7.5	5	2-M4
SD780-3R3A-**								
SD780-5R5A-**								

Technical Specifications

Items	Specification		
Control method	IGBT, PWM control, sine wave current drive mode		
Encoder feedback	Serial encoders: Absolute encoders		
Environmental conditions	Operating temperature	0°C~55°C(55°C~60°C, can be used after reducing the rated value)	
	Storage temperature	-20°C~65°C	
	Operating humidity	Below 95%RH (no freezing, condensation)	
	Storage humidity	Below 95%RH (no freezing, condensation)	
	Seismic resistance	4.9m/s	
	Impact resistance	19.6m/s ²	
	Protection level	IP20	
	Altitude	Below 1000m(When 1000m~2000m, need to reduce the rated value after use)	
Other	No electrostatic interference, strong electric field, strong magnetic field, radiation, etc		
Speed Control	Speed control range	1: 5000	
	Velocity fluctuation rate	Load fluctuation	Less than ±0.01% of rated speed
		Voltage fluctuation	0% of rated speed
Temperature fluctuation		Less than ±0.01% of rated speed	
Torque Control	Torque control accuracy	±1%	
	Soft start time setting	0s~10s	
Position control	Feed-forward compensation	0%~100%	
	Command pulse	Command pulse pattern	It includes three command forms: "pulse+direction", "CW+CCW pulse sequence" and "A, B phase quadrature pulse"
		Input form	Linear drive, open collector
		Maximum input frequency	Differential input: high speed max. 4Mpps; Open collector: maximum 200Kpps;
Communication function	485	Standard configuration	
	CAN	Optional	
	USB	Computer host, standard, USB 2.0 compliant (12Mbps)	
Display function	CHARGE、8-segment LED×5 digits		
Panel operator function	Push button switch×4pcs		
Regeneration treatment	Function can be built-in/external		
Protection function	Overcurrent, overvoltage, undervoltage, overload, regenerative fault, encoder disconnection, overtravel protection, etc.		
Auxiliary function	Gain adjustment, alarm recording, JOG operation, etc.		
Encoder pulse frequency division output	Phase A, Phase B, Phase C: Linear drive output, number of divided pulses: 35~32767		

Motor model description

V7U - L 06 A - R40 30 - D 1 □

Product Series
V7U

Inertia level
L: Low inertia
M: Medium inertia
H: High inertia

Installation flange
04:40mm
06:60mm
08:80mm

The rated voltage
A: 220V AC

Rated power

Code	Power	Code	Power
R05	50W	R60	600W
R10	100W	R75	750W
R20	200W	1R0	1.0KW
R40	400W		

Internal management number

Code	Axis		Oil seal		Brake	
	Round shaft	Key Shaft	Yes	None	Yes	None
1		•	•			•
2		•	•		•	

Encoder type
D: 23-bit multi-turn absolute optical encoder
Q: 17-bit single-turn absolute magnetic encoder
R: 17-bit multiturn absolute magnetic encoder

Rated speed (RPM) Motor brake power table (estimated values)

Rated speed (RPM)	Installation flange	Brake power
15:1500		
20:2000	40	7W
25:2500	60	10W
30:3000	80	15W




Motor features

V7U Model	Voltage (V)	Power (W)	Rated torque (N·m)	Rated speed (RPM)	Max Speed (RPM)	Rated current (A)	Max current (A)	Moment of inertia
V7U-L04A-R0530-□1	220	50	0.16	3000	6000	1	3	0.027kg·cm ²
V7U-R04A-R0530-□2	220	50	0.16	3000	6000	1	3	0.028kg·cm ²
V7U-L04A-R1030-□1	220	100	0.32	3000	6000	1	3	0.051kg·cm ²
V7U-L04A-R1030-□2	220	100	0.32	3000	6000	1	3	0.052kg·cm ²
V7U-L06A-R2030-□1	220	200	0.64	3000	6000	1.7	5.1	0.18kg·cm ²
V7U-L06A-R2030-□2	220	200	0.64	3000	6000	1.7	5.1	0.2kg·cm ²
V7U-L06A-R4030-□1	220	400	1.27	3000	6000	2.6	7.8	0.34kg·cm ²
V7U-L06A-R4030-□2	220	400	1.27	3000	6000	2.6	7.8	0.36kg·cm ²
V7U-M06A-R4030-□1	220	400	1.27	3000	6000	2.6	7.8	0.67kg·cm ²
V7U-M06A-R4030-□2	220	400	1.27	3000	6000	2.6	7.8	0.69kg·cm ²
V7U-L08A-R7530-□1	220	750	2.38	3000	6000	4.6	13.8	1.02kg·cm ²
V7U-L08A-R7530-□2	220	750	2.38	3000	6000	4.6	13.8	1.13kg·cm ²
V7U-L08A-R7530-□1L	220	750	2.38	3000	4000	3.1	9.3	1.02kg·cm ²
V7U-L08A-R7530-□2L	220	750	2.38	3000	4000	3.1	9.3	1.13kg·cm ²
V7U-M08A-R7530-□1	220	750	2.38	3000	6000	4.6	13.8	2.3kg·cm ²
V7U-M08A-R7530-□2	220	750	2.38	3000	6000	4.6	13.8	2.41kg·cm ²
V7U-M08A-R7530-□1L	220	750	2.38	3000	4000	3.1	9.3	2.3kg·cm ²
V7U-M08A-R7530-□2L	220	750	2.38	3000	4000	3.1	9.3	2.41kg·cm ²
V7U-L08A-1R030-□1	220	1000	3.18	3000	5000	5	16.5	1.34kg·cm ²
V7U-L08A-1R030-□2	220	1000	3.18	3000	5000	5	16.5	1.45kg·cm ²
V7U-M08A-1R030-□1	220	1000	3.18	3000	5000	5	15	2.62kg·cm ²
V7U-M08A-1R030-□2	220	1000	3.18	3000	5000	5	15	2.73kg·cm ²

Motor Dimension


40 flange

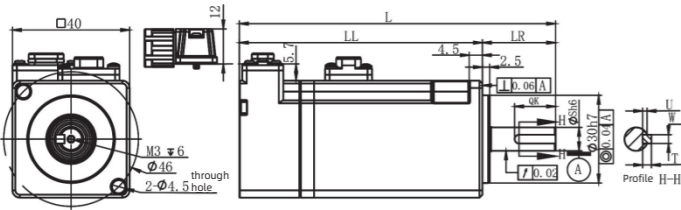

Unit: mm

Motor model	L	LL	LR	S	QK	U	W	T
V7U-L04A-R0530-□1	94	69	25	8	14	1.5	3	3
V7U-L04A-R0530-□2	120	95	25	8	14	1.5	3	3
V7U-L04A-R1030-□1	108	83	25	8	14	1.5	3	3
V7U-L04A-R1030-□2	134	109	25	8	14	1.5	3	3


60 flange

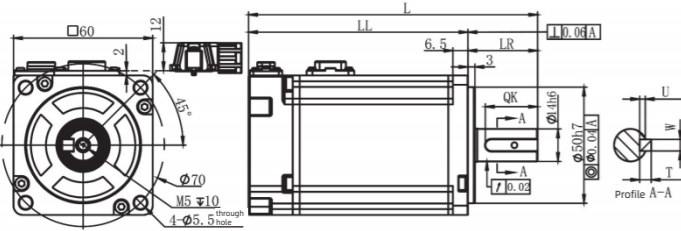

Unit: mm

Motor model	L	LL	LR	S	QK	U	W	T
V7U-L06A-R2030-□1	105.5	75.5	30	14	22.5	2.5	5	5
V7U-L06A-R2030-□2	136.5	106.5	30	14	22.5	2.5	5	5
V7U-L06A-R4030-□1	124.5	94.5	30	14	22.5	2.5	5	5
V7U-L06A-R4030-□2	155.5	125.5	30	14	22.5	2.5	5	5
V7U-M06A-R4030-□1	134.5	104.5	30	14	22.5	2.5	5	5
V7U-M06A-R4030-□2	165.5	135.5	30	14	22.5	2.5	5	5

80 flange

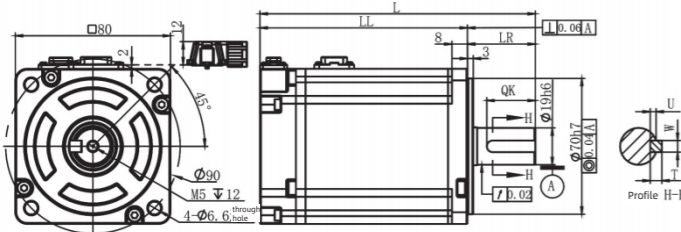


Unit: mm

Motor model	L	LL	LR	S	QK	U	W	T
V7U-L08A-R7530-□1L	142	107	35	19	25	3	6	6
V7U-L08A-R7530-□2L	174	139	35	19	25	3	6	6
V7U-L08A-R7530-□1	142	107	35	19	25	3	6	6
V7U-L08A-R7530-□2	174	139	35	19	25	3	6	6
V7U-M08A-R7530-□1	152	117	35	19	25	3	6	6
V7U-M08A-R7530-□2	184.5	149.5	35	19	25	3	6	6
V7U-M08A-R7530-□1L	152	117	35	19	25	3	6	6
V7U-M08A-R7530-□2L	162	149	35	19	25	3	6	6
V7U-L08A-1R030-□1	156	121	35	19	25	3	6	6
V7U-L08A-1R030-□2	188	153	35	19	25	3	6	6
V7U-M08A-1R030-□1	166	131	35	19	25	3	6	6
V7U-M08A-1R030-□2	198	163	35	19	25	3	6	6


Motor overload characteristic curve

Overload ratio	Overload time /s	Overload ratio	Overload time /s
1.2	228	2.0	10
1.3	73	2.1	8
1.4	42	2.2	7
1.5	29	2.3	6
1.6	22	2.4	5
1.7	17	2.5	4.5
1.8	14	3.0	3
1.9	12		

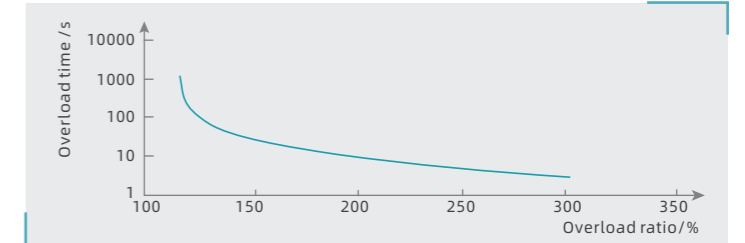


Torque characteristics of servo motor

Note: " — " is the rated torque " — " is the instantaneous maximum torque

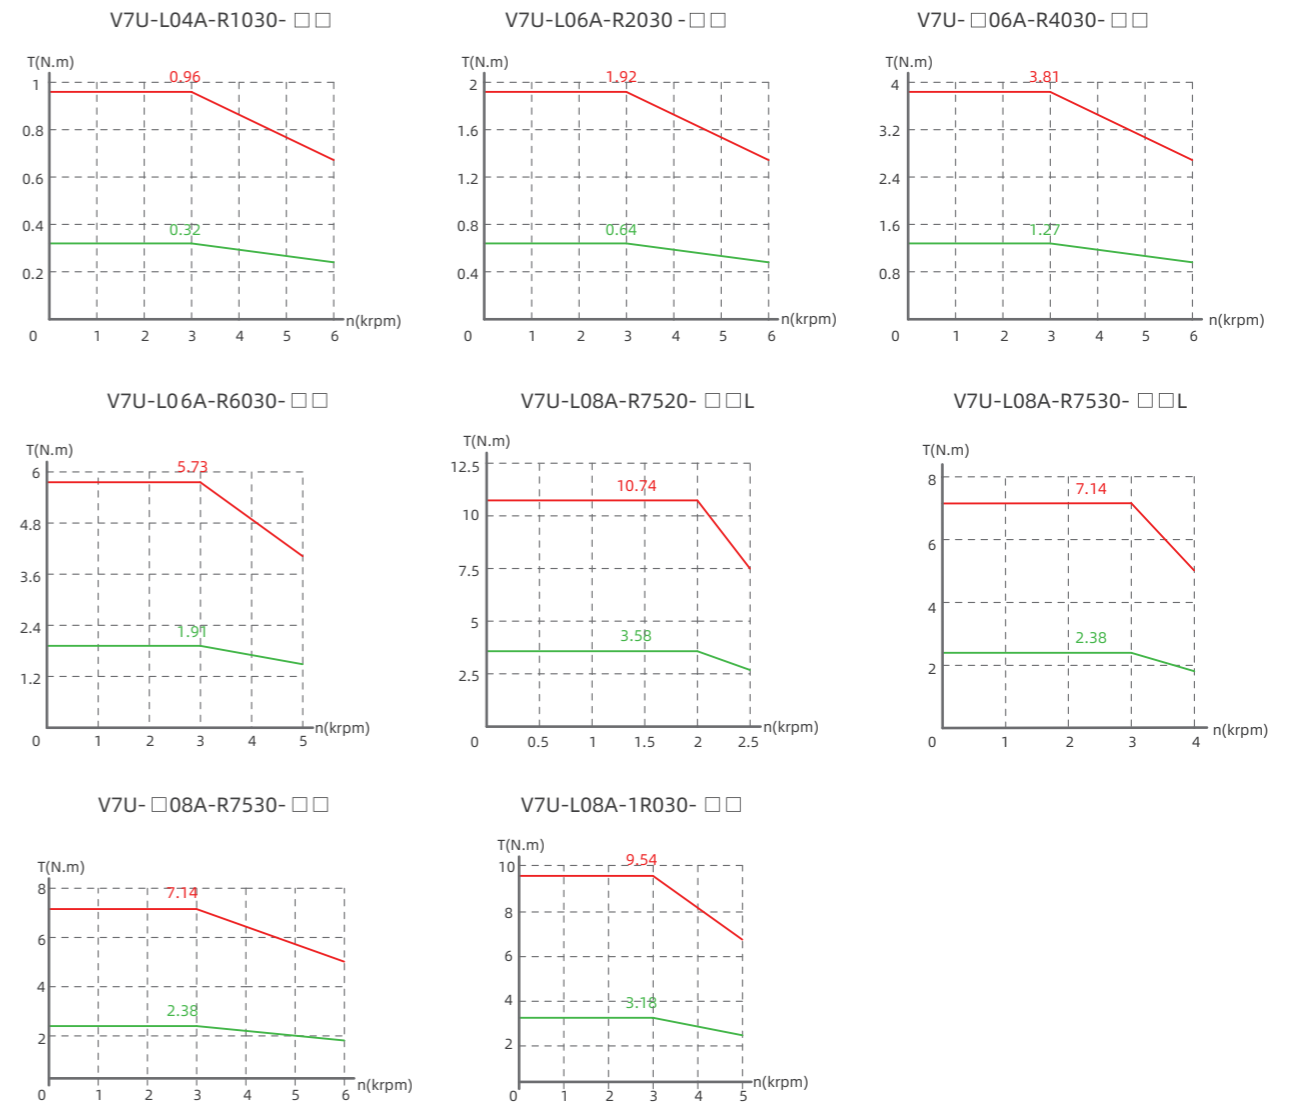


System application wiring guide

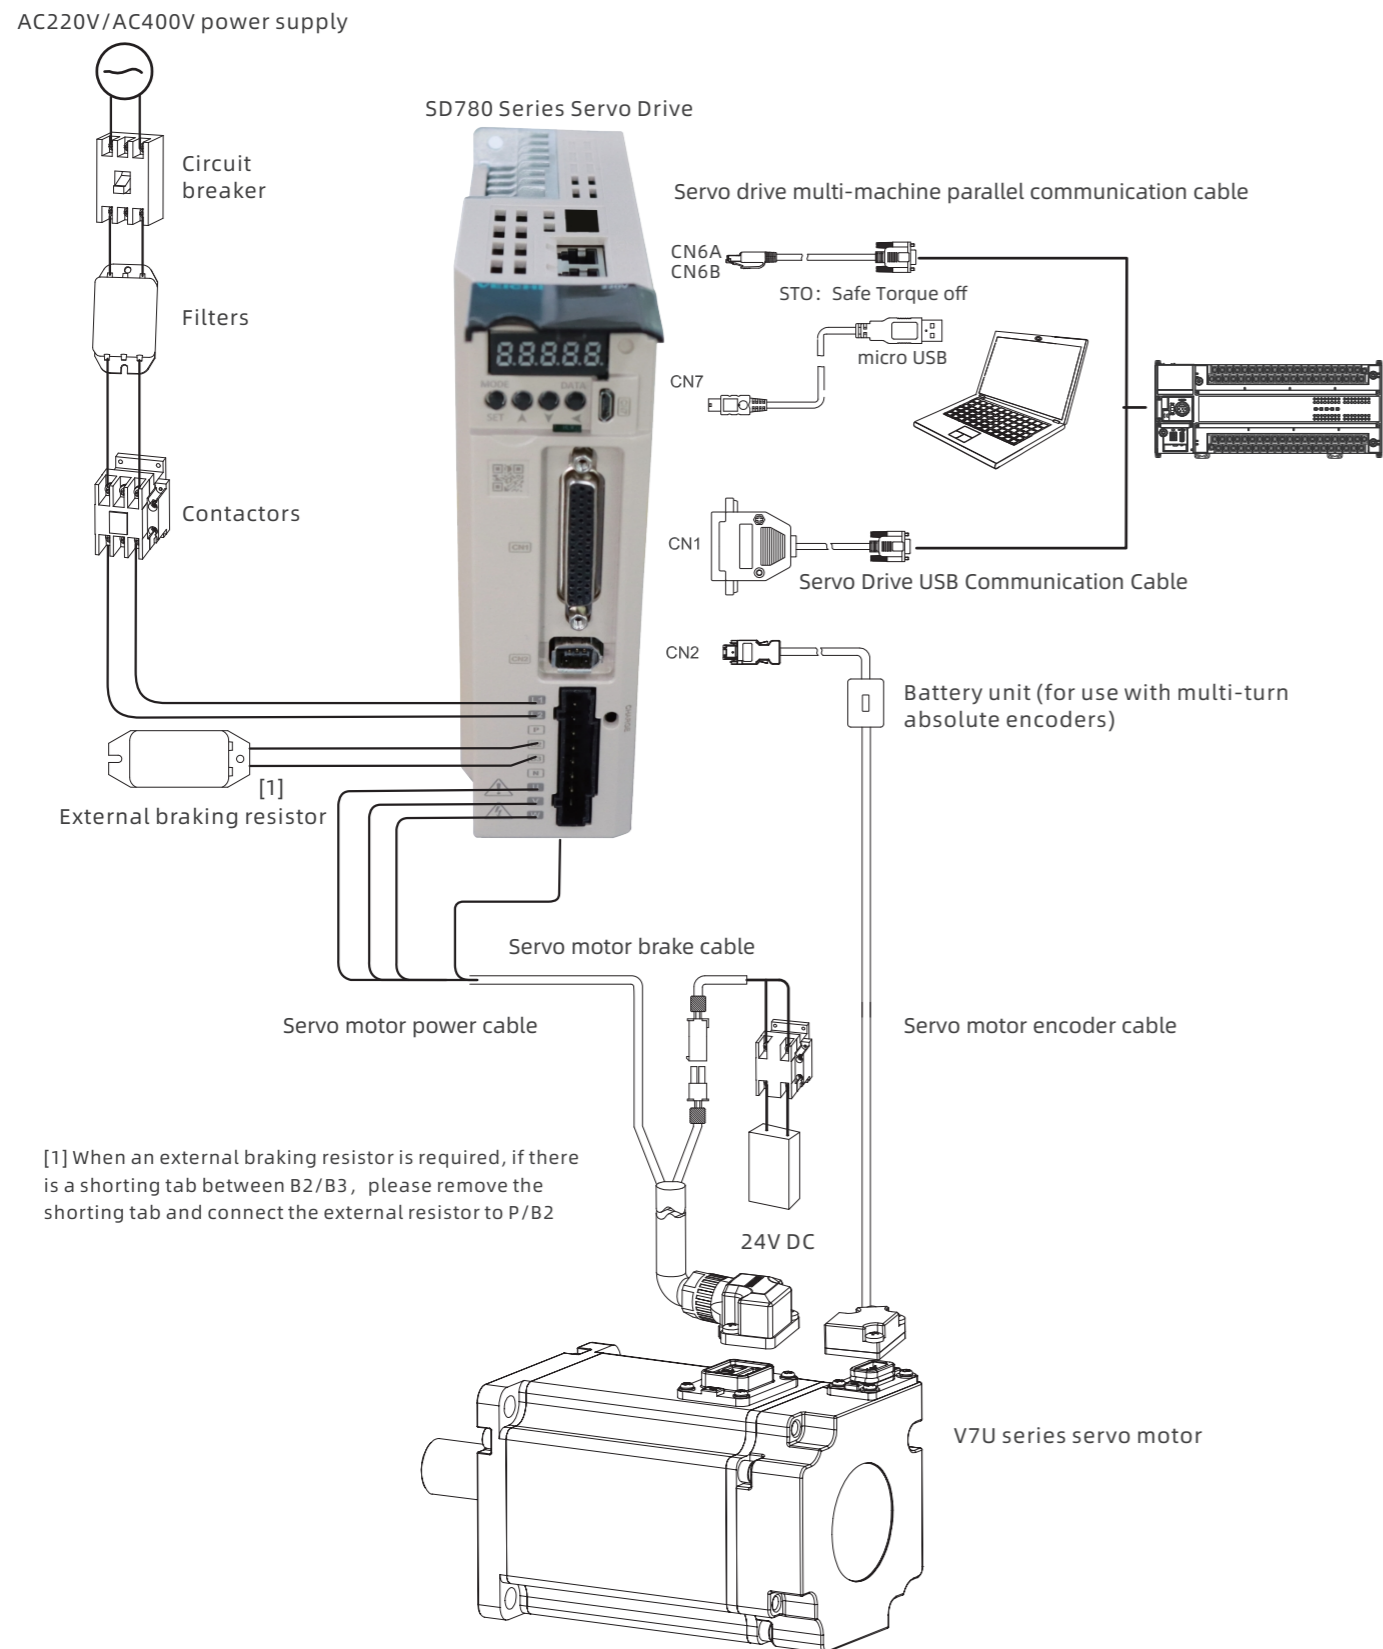

[1] When an external braking resistor is required, if there is a shorting tab between B2/B3, please remove the shorting tab and connect the external resistor to P/B2


Position control wiring diagram

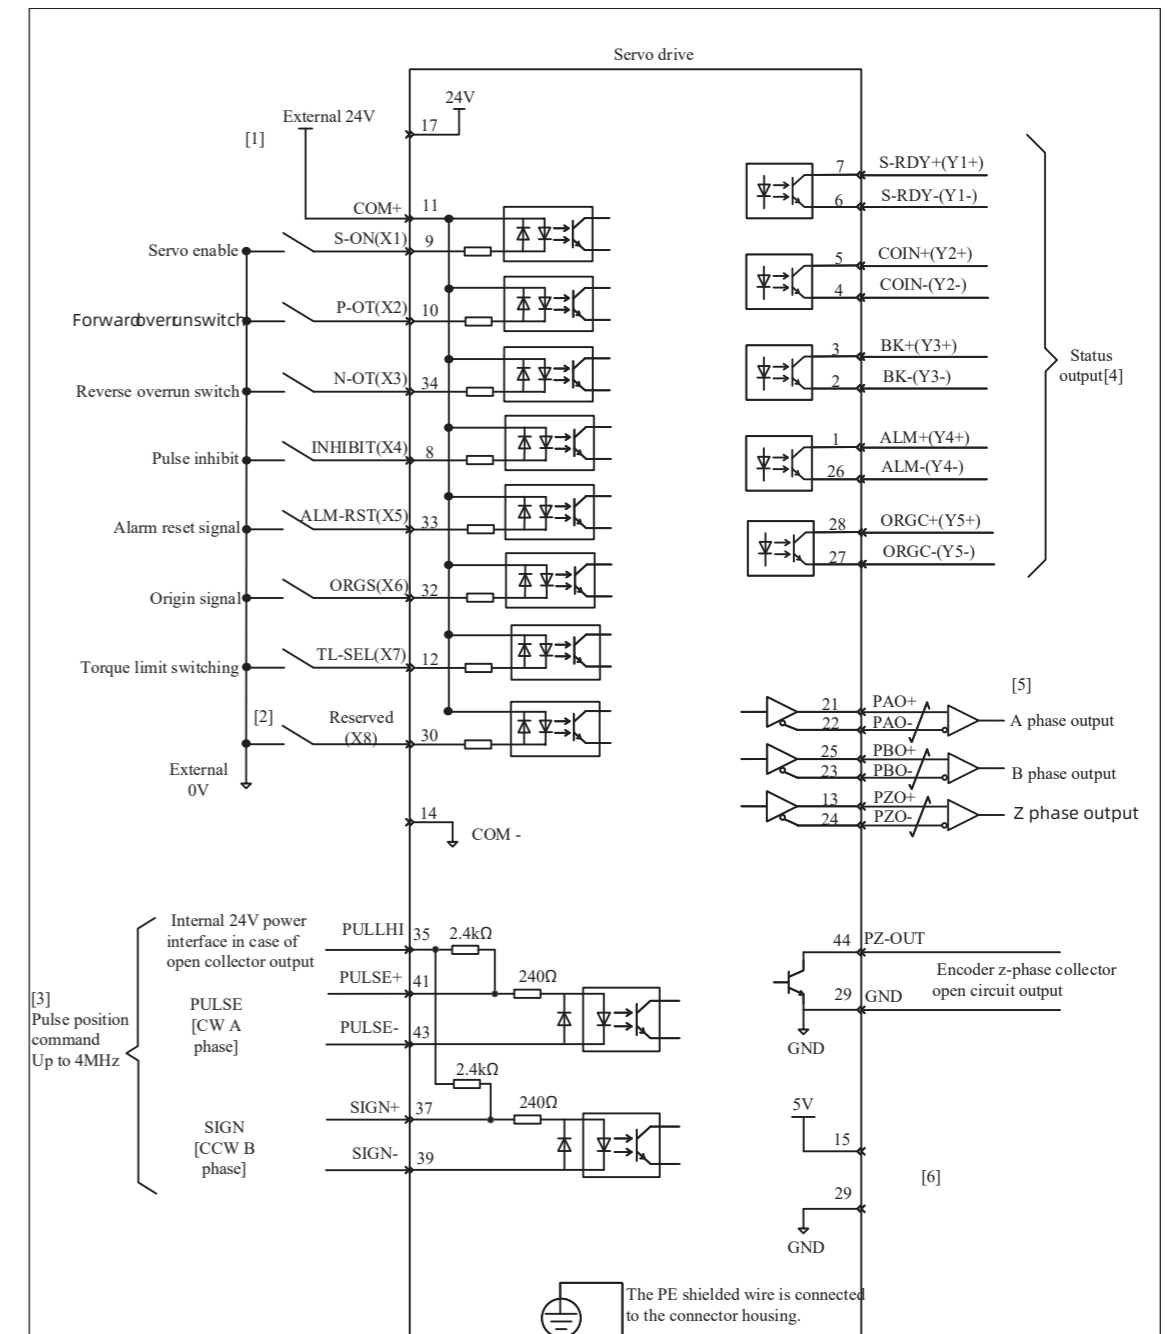

- [1] Example is external power supply wiring; if using internal 24V power supply, please connect pin 17 (24V positive) to pin 11, and the connection of input terminal corresponds to pin and pin 14 (COM-).
- [2] X7 and X8 are high-speed DI terminals, please choose to use them according to the function.
- [3] Pulse port wiring please use twisted shielded wire, the shield must be connected to PE at both ends, GND and the upper computer signal ground reliable connection.
- [4] Y output power supply is user-provided, the power supply range is 5~24V. Y port maximum allowable voltage DC30V, maximum allowable current 50mA.
- [5] Please use twisted shielded cable for the encoder frequency divider output cable, the shield layer must be connected to PE at both ends, and GND must be connected to the signal ground of the upper computer reliably.
- [6] Internal +5V power supply, maximum running current 200mA.

SD780 drive wire introduction


Power cable naming rules

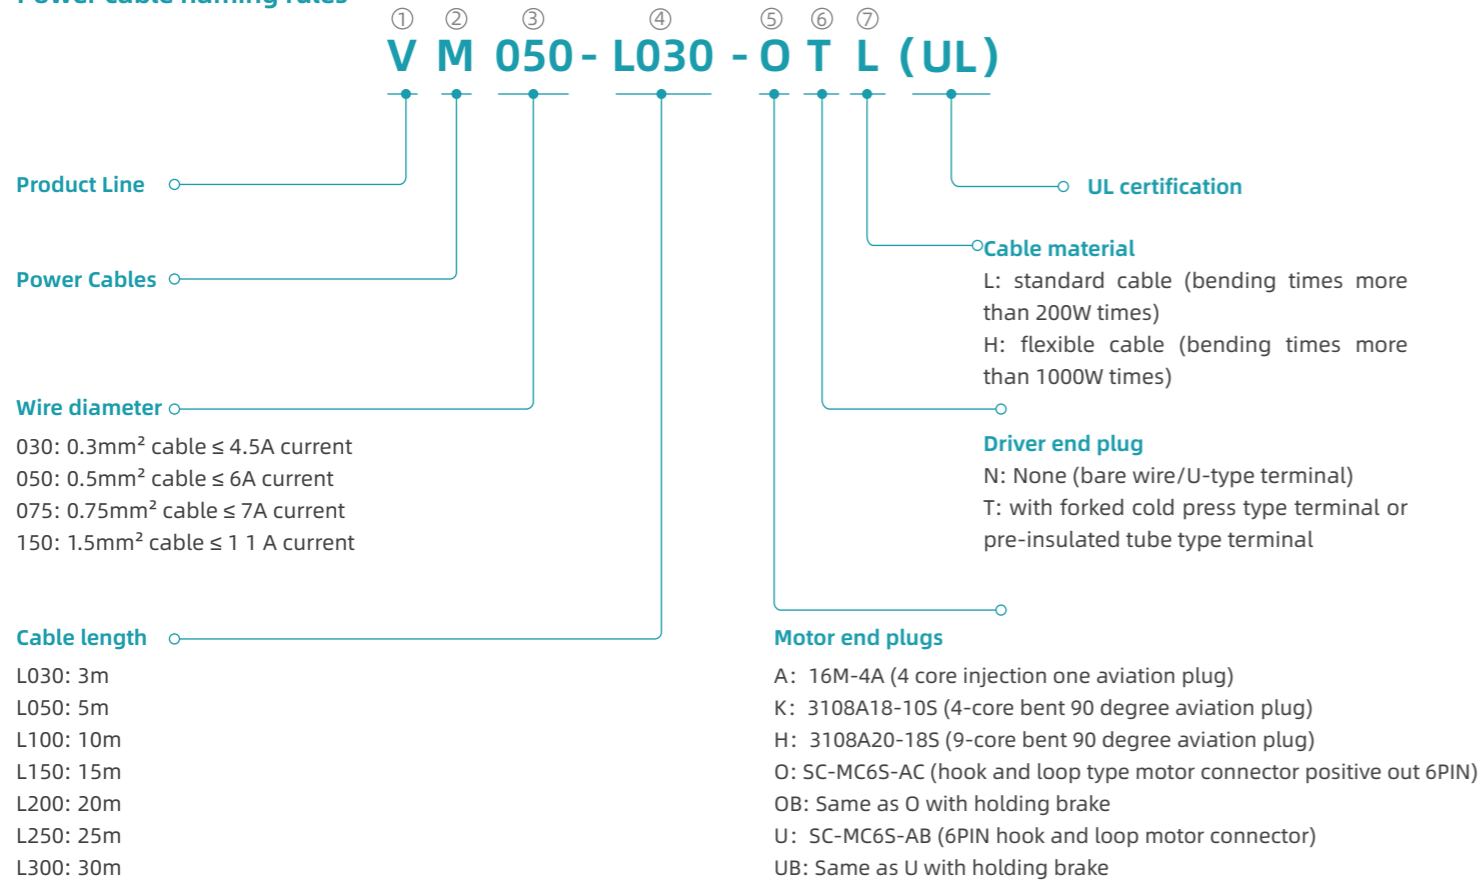

Motor power cord


VM030-④-UT⑦ (UL)

40 Flange
 Motor power
 cable without brake




VM030-④-UBT⑦ (UL)

40 Flange
 Motor power
 cable with brake




VM050-④-OT⑦ (UL)

60/80 flange
 Motor power
 cable without brake




VM050-④-OBT⑦ (UL)

60/80 flange
 Motor power
 cable with brake




VM150-④-KN⑦ (UL)

110/130 flange
 Motor power
 cable without brake

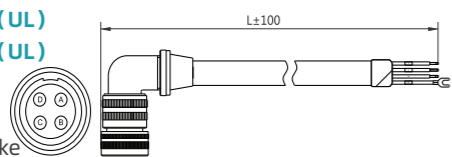


VM150-④-HN⑦ (UL)

110/130 flange
 Motor power
 cable with brake

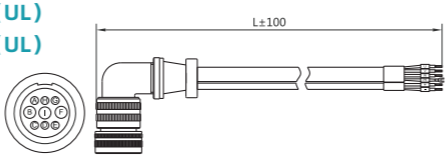

Encoder cable naming rules

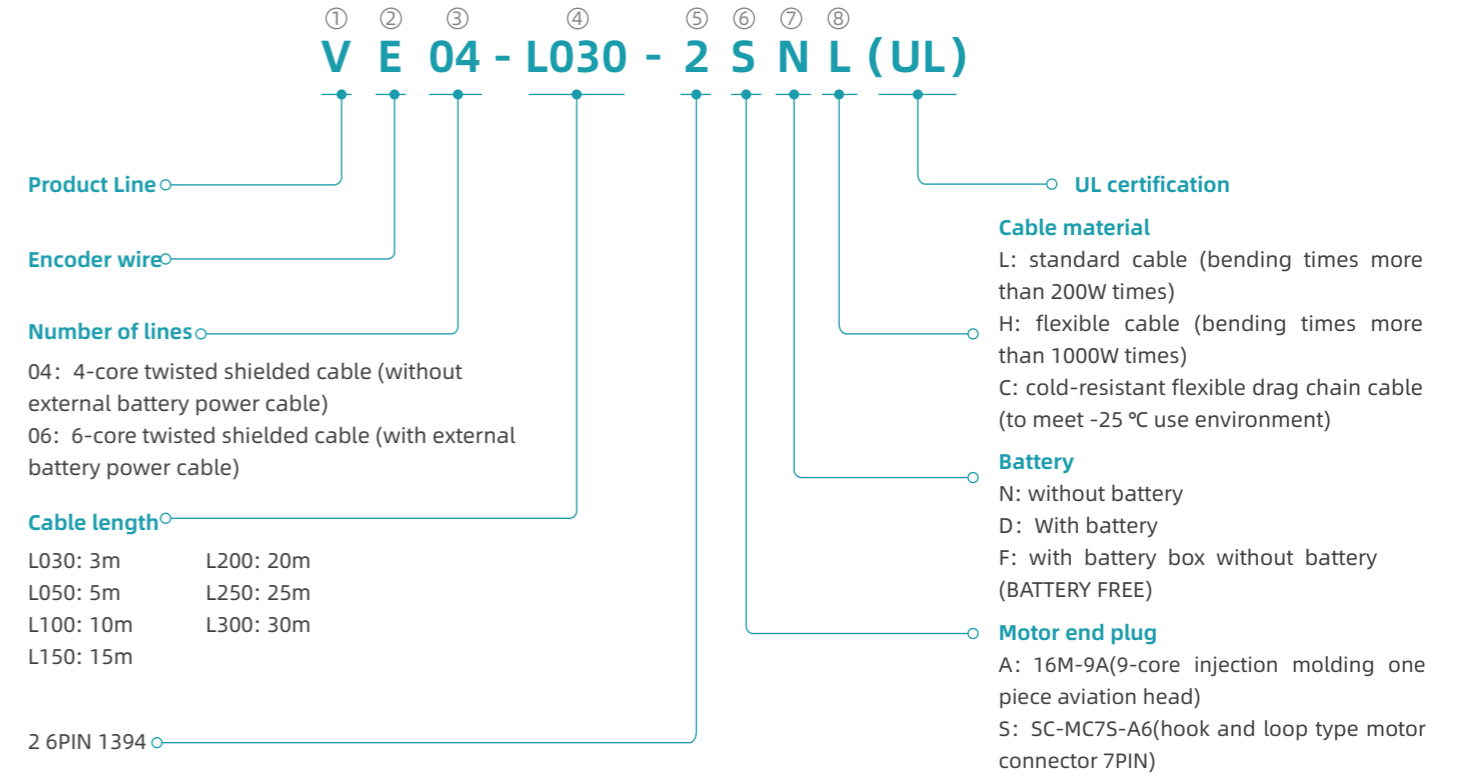


Note: The length of the encoder wire ⑤⑥ defined as "2S" is more than 15 meters, you need to use the encoder wire ⑤⑥ defined as "2A" plus adapter wire solution.

Encoder wire


VE04-④-2SN⑧ (UL)

40/60/80
 Flange motor
 encoder cable
 Without battery

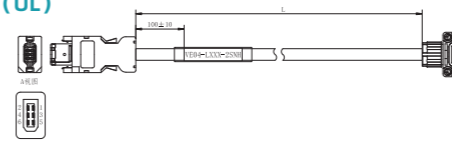


VE06-④-2SD⑧ (UL)

40/60/80
 Flange motor
 encoder cable
 With battery

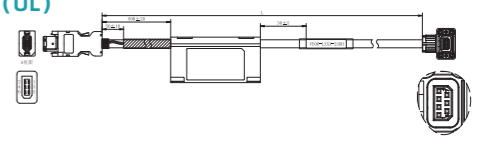


VE04-④-2AN⑧ (UL)

110 Flange motor
 encoder cable
 Without battery

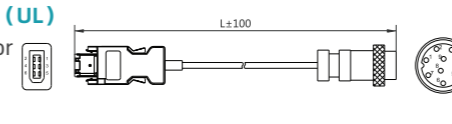

VE06-④-2AD⑧ (UL)

110 Flange motor
 encoder cable
 With battery

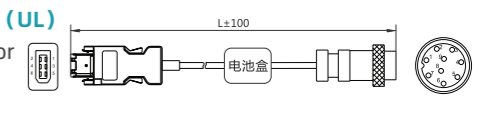


Braking resistor selection

Model	Braking voltage	Built-in resistors	External resistor minimum	External resistor max
SD780-1R8A	380V	None	40Ω	200Ω
SD780-3R3A	380V	None	40Ω	100Ω
SD780-5R5A	380V	40Ω 60W	25Ω	70Ω


Motor brake column

	Model	Static torque N.m	Rated voltage V	Rated current A
40	Z092-S040B(24V)0.38G8.5-001	0.38	24±10%	0.25
60	Z029-S060B(24V)1.5G12	1.5	24±10%	0.32
80	Z122-S080B(24V)3.8G16-002	3.8	24±10%	0.35


Applications




Printing and Packaging




3C Products




Engraving Machine




Woodworking Machine



Manipulator



New Energy Vehicles



Power Battery

Service and Support

Technology innovation, service first

Practicing the service concept of "customer-centered" and create service system in five aspects .

Dual platform service of network and telephone, you can keep up with the service in real time. With the service of "Focused, patience and concentration". Really let our customers can buy products with confidence and use them comfortably".

